


Komposit isolatorer

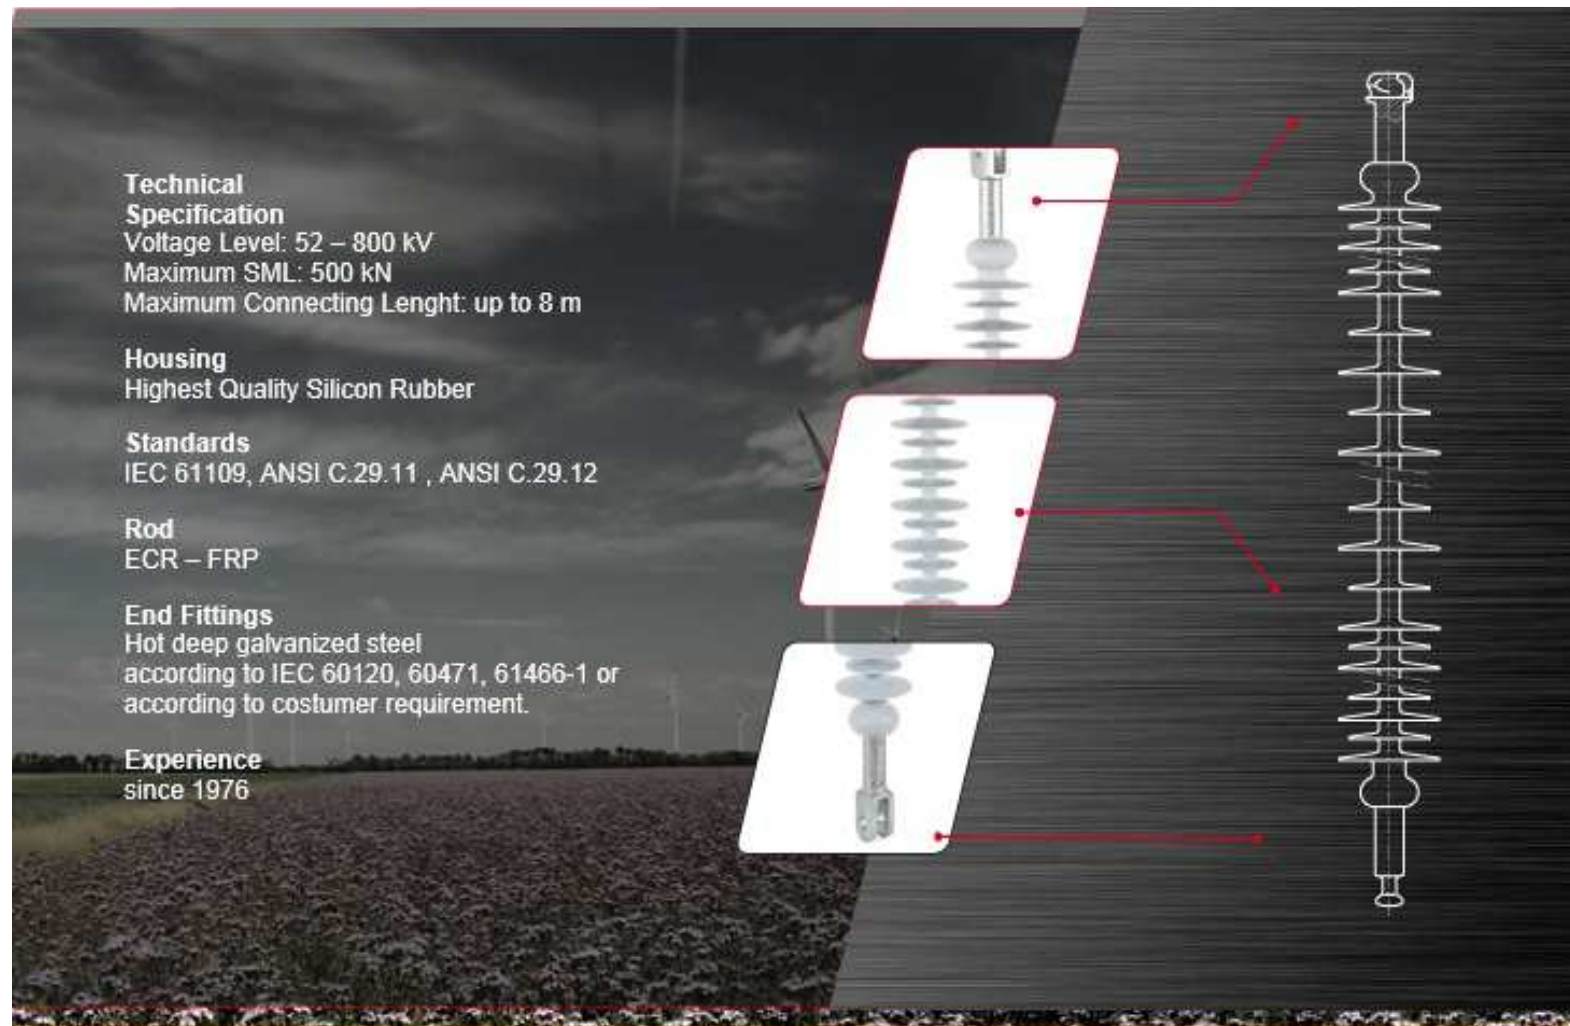

Technical Specification
Voltage Level: 52 – 800 kV
Maximum SML: 500 kN
Maximum Connecting Length: up to 8 m

Housing
Highest Quality Silicon Rubber

Standards
IEC 61109, ANSI C.29.11 , ANSI C.29.12

Rod
ECR – FRP

End Fittings
Hot deep galvanized steel
according to IEC 60120, 60471, 61466-1 or
according to customer requirement.

Experience
since 1976



S. Tygesen Energi A/s

Leverandør til energi-entreprenør og telesektoren